



KEMBLA

Flexible Hoses



MM Kembla Flexible Stainless Steel Braided PEX Hoses are high quality flexible connectors for hot and cold water applications suitable for internal external use. Manufactured using high quality and long lasting cross linked polyethylene (PEX) inner tube, strong silicone rubber cone seal and 304 Stainless Steel outer braid. Backed by a 15 year warranty by one of Australia's leading piping system distributors.



Features

- For Hot & Cold water applications
- Female Hex Nut connection points (1/2")
- High strength long lasting silicon cone seal
- 304 Stainless Steel braid and ferrule
- Cross linked polyethylene (PEX) inner tube
- CW617N Brass alloy nut
- Max. safe working pressure 1400 kPa

Technical Specifications

- Certified compliant to product standard AS/NZS 3499
- Watermark certified (WM-032138)

Installation Instructions


- Tighten hex nuts to 5 Nm torque
- For use in exposed locations only. Not suitable behind walls, ceilings or underground
- Minimum bend radius of 30mm
- Do not over tighten
- Do not stretch, twist, kink or expose to naked flames or corrosive agents
- Do not install directly to water heating systems
- It is recommended flexible hoses are connected to an isolation valve
- Inspect hose for any leaks after installation
- To be installed by a licensed plumber

Kembla Stainless Steel Braided Hoses Specifications

Application	Hot & cold water applications. Suitable for external use
Features	Female hex silicon cone seal; 304 Stainless Braid & Ferrule; CW617N Nut; DZR Barb; PEX inner tube
Max. Safe Work Pressure	1400 kPa
Operating Temperature	5°C to 90°C
Product Standard	AS/NZS 3499
Watermark No.	WM-032138
Product Warranty	15 Years


Straight Flexible Connectors

Item Code	Description	Connection Size (inch)	Length (mm)	Inside Diameter (mm)	Bag Qty
G08274	KEMBLA SS PEX FLEXIBLE HOSE 150MM	1/2"	150	8	5
G08275	KEMBLA SS PEX FLEXIBLE HOSE 225MM	1/2"	225	8	5
G08276	KEMBLA SS PEX FLEXIBLE HOSE 300MM	1/2"	300	8	5
G08277	KEMBLA SS PEX FLEXIBLE HOSE 450MM	1/2"	450	8	5
G08278	KEMBLA SS PEX FLEXIBLE HOSE 600MM	1/2"	600	8	5
G08279	KEMBLA SS PEX FLEXIBLE HOSE 1000MM	1/2"	1000	8	1
G08280	KEMBLA SS PEX FLEXIBLE HOSE 1500MM	1/2"	1500	8	1

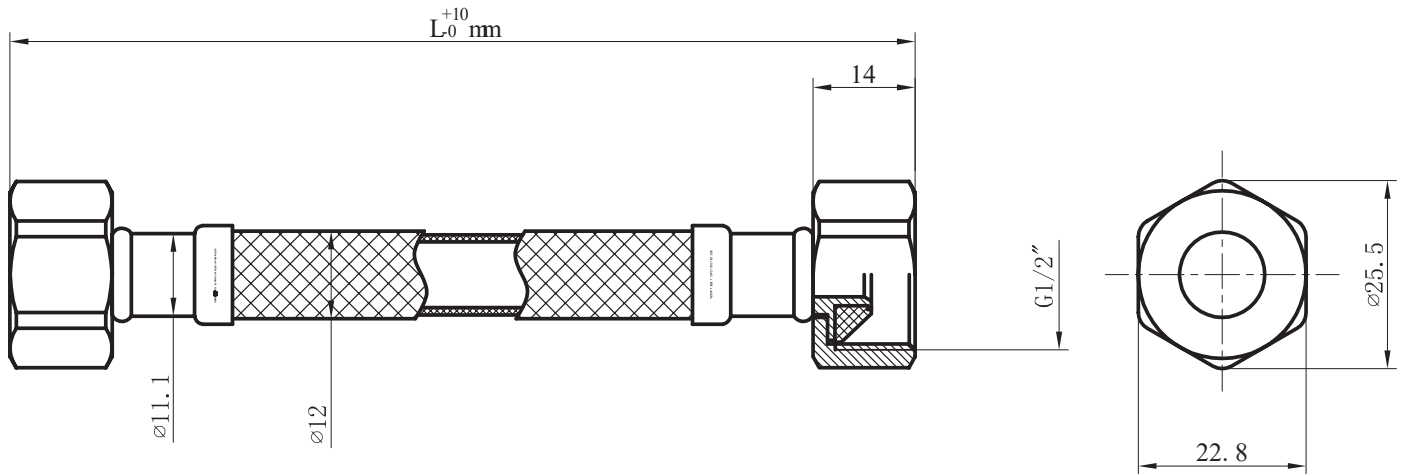

Elbow Flexible Connectors

Item Code	Description	Connection Size (inch)	Length (mm)	Inside Diameter (mm)	Bag Qty
G08281	KEMBLA SS PEX FLEXIBLE HOSE ELBOW 300MM	1/2"	300	8	5
G08282	KEMBLA SS PEX FLEXIBLE HOSE ELBOW 450MM	1/2"	450	8	5
G08283	KEMBLA SS PEX FLEXIBLE HOSE ELBOW 600MM	1/2"	600	8	5

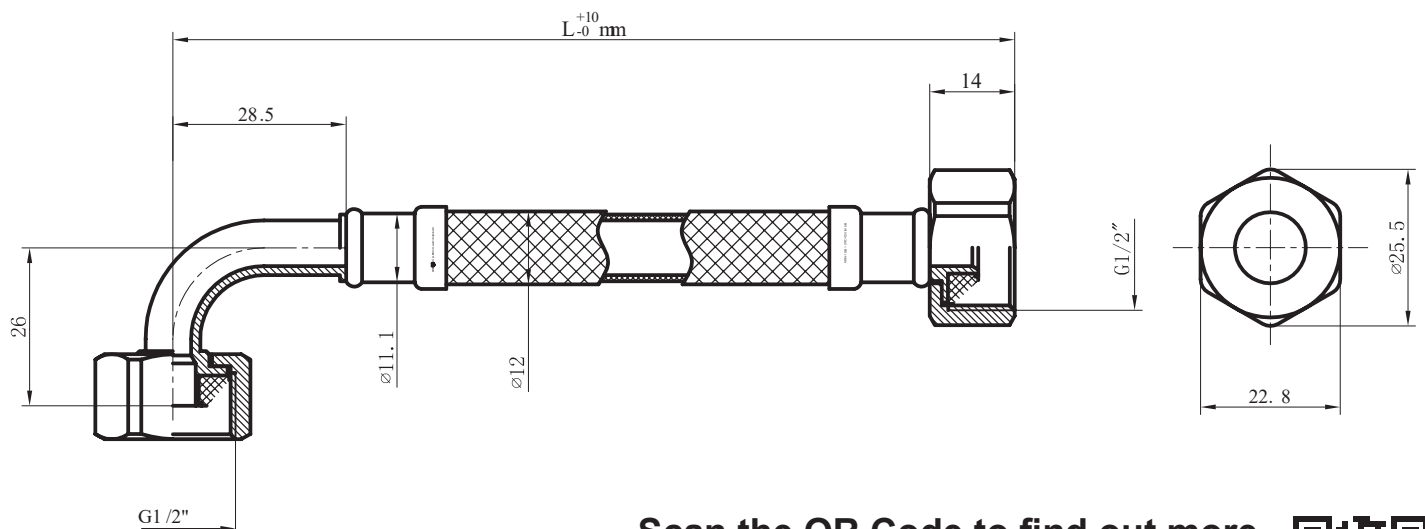

Scan the QR Code to find out more

MM Kembla, ABN 13 003 762 641

30 Gloucester Boulevard, PO Box 21 Port Kembla, NSW 2505

T: 1800 804 631 F: 1800 817 846 E: sales@kembla.com.au www.kembla.com.au

